

Parts Manual
45-8176EN
03/31/2016

OMEGA TECHNOLOGIES

DOTCO®

12-27 Series
Right Angle Grinders



For additional product information visit our website at:

<https://dotcotool.com/product-category/dotco-air-tools/dotco-grinders/dotco-right-angle-grinders/dotco-12-27-series-right-angle-grinders/>

“A”

12	X	2	7	XX	-	XX	XX	OH
-----------	----------	----------	----------	-----------	----------	-----------	-----------	-----------

Product Type
12 = Ergo Handle Grinder/Sander

Throttle Type
L = Locking Lever

S = Locking Lever

Motor Size
2 = 0.9 hp

Handle Style
7 = Right Angle

Speed Options (RPM)
Side Exhaust
36 = 13,500

37 = 12,000

38 = 14,500

Rear Exhaust
16 = 18,000

76 = 13,500

77 = 12,000

78 = 14,500

Termination Code
27 = 3" Type 1 Cut-Off Wheel

28 = 4" Type 1 Cut-Off Wheel

30 = 1/4"-20 Internal Thread Spindle

32 = 1/4"-28 Internal Thread Spindle

35 = 3/8"-24 Internal Thread Spindle

36 = 300 Series Collet (3 piece)

45 = Universal Collet (short)

64 = 4" Depressed Center Wheel

83 = 3" Depressed Center Wheel

84 = 4" Depressed Center Wheel

Optional Collet (no extra cost)
08 = 1/8"

10 = 5/32"

12 = 3/16"

14 = 7/32"

18 = 9/32"

20 = 5/16"

22 = 11/32"

24 = 3/8"

M6 = 6mm

M8 = 8mm

Optional Collet (no extra cost)
OH = Overhose (rear exhaust models)

Dotco®
Description and Instructions

45-8176EN
03/31/2016

The original language of this manual is English.

Product Safety Information:

Intended Use:

This pneumatic grinder is to be used only for removing material by utilizing appropriate abrasive wheels, rotary files or other material removal cutting devices.

For additional product safety information refer to Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG document GS-2007, General Safety Pneumatic Grinders.



The grinder must not be modified in any manner unless approved in writing by Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG. All safety devices must be properly installed and maintained in good working order.

EC Declaration of Conformity:

We affirm that this machine is in accordance with the following EC regulations (2006/42/EC). Applied harmonized standards are ISO 12100:2010.

The name, job function and address of the person authorized to compile the technical file.

Mr. Vishnu Irigireddy
Director of Global R&D- Mechanical Engineering
Apex Tool Group
670 Industrial Drive
Lexington, SC 29072

Signature: Vishnu Irigireddy
Date: 03/31/2016

Noise and Vibration:

Sound Level: ≤ 83 dB(A)

Vibration: < 2.5 m/s²

Air Line Lubrication:

Use Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG's lightweight air tool oil 500021 (available in quantities shown in the following chart) or an SAE-5 lightweight spindle oil.

Part No.	Packaged	Designation
540397	1 Quart (0.94 liter)	Airlube 10W/NR-420LB DR
533485	1 US Gallon (3.78 liter)	Airlube 10W/NR-420LB DR

Air Supply Line:

Parameter	Description
Air Hose	Minimum inside diameter: 5/16" (7.9mm) Maximum length: 8.0' (2.4 m)
Working pressure range	Performance rated at: 90 psi (620 kPa)
Compressed air	Air quality according to ISO 8573-1, quality class 2.4.3 The compressed air must be clean and dry.

Service and Repair:

Tool service and repair should be performed by an authorized Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG Center. Refer to the last page of this manual for locations.

Disposal:




Observe local disposal guidelines for all components of this tool and its packaging.

Copyright Protection:

Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG reserves the right to modify, supplement or improve this document or the product without prior notice. This document may not be reproduced in any way, shape or form, in full or parts thereof, or copied to another natural or machine readable language or to a data carrier, whether electronic, mechanical, optical or otherwise without the express permission of Apex Tool Group, LLC or Apex Tool Group GmbH & Co. OHG

Dotco®
Handle and Motor Assembly

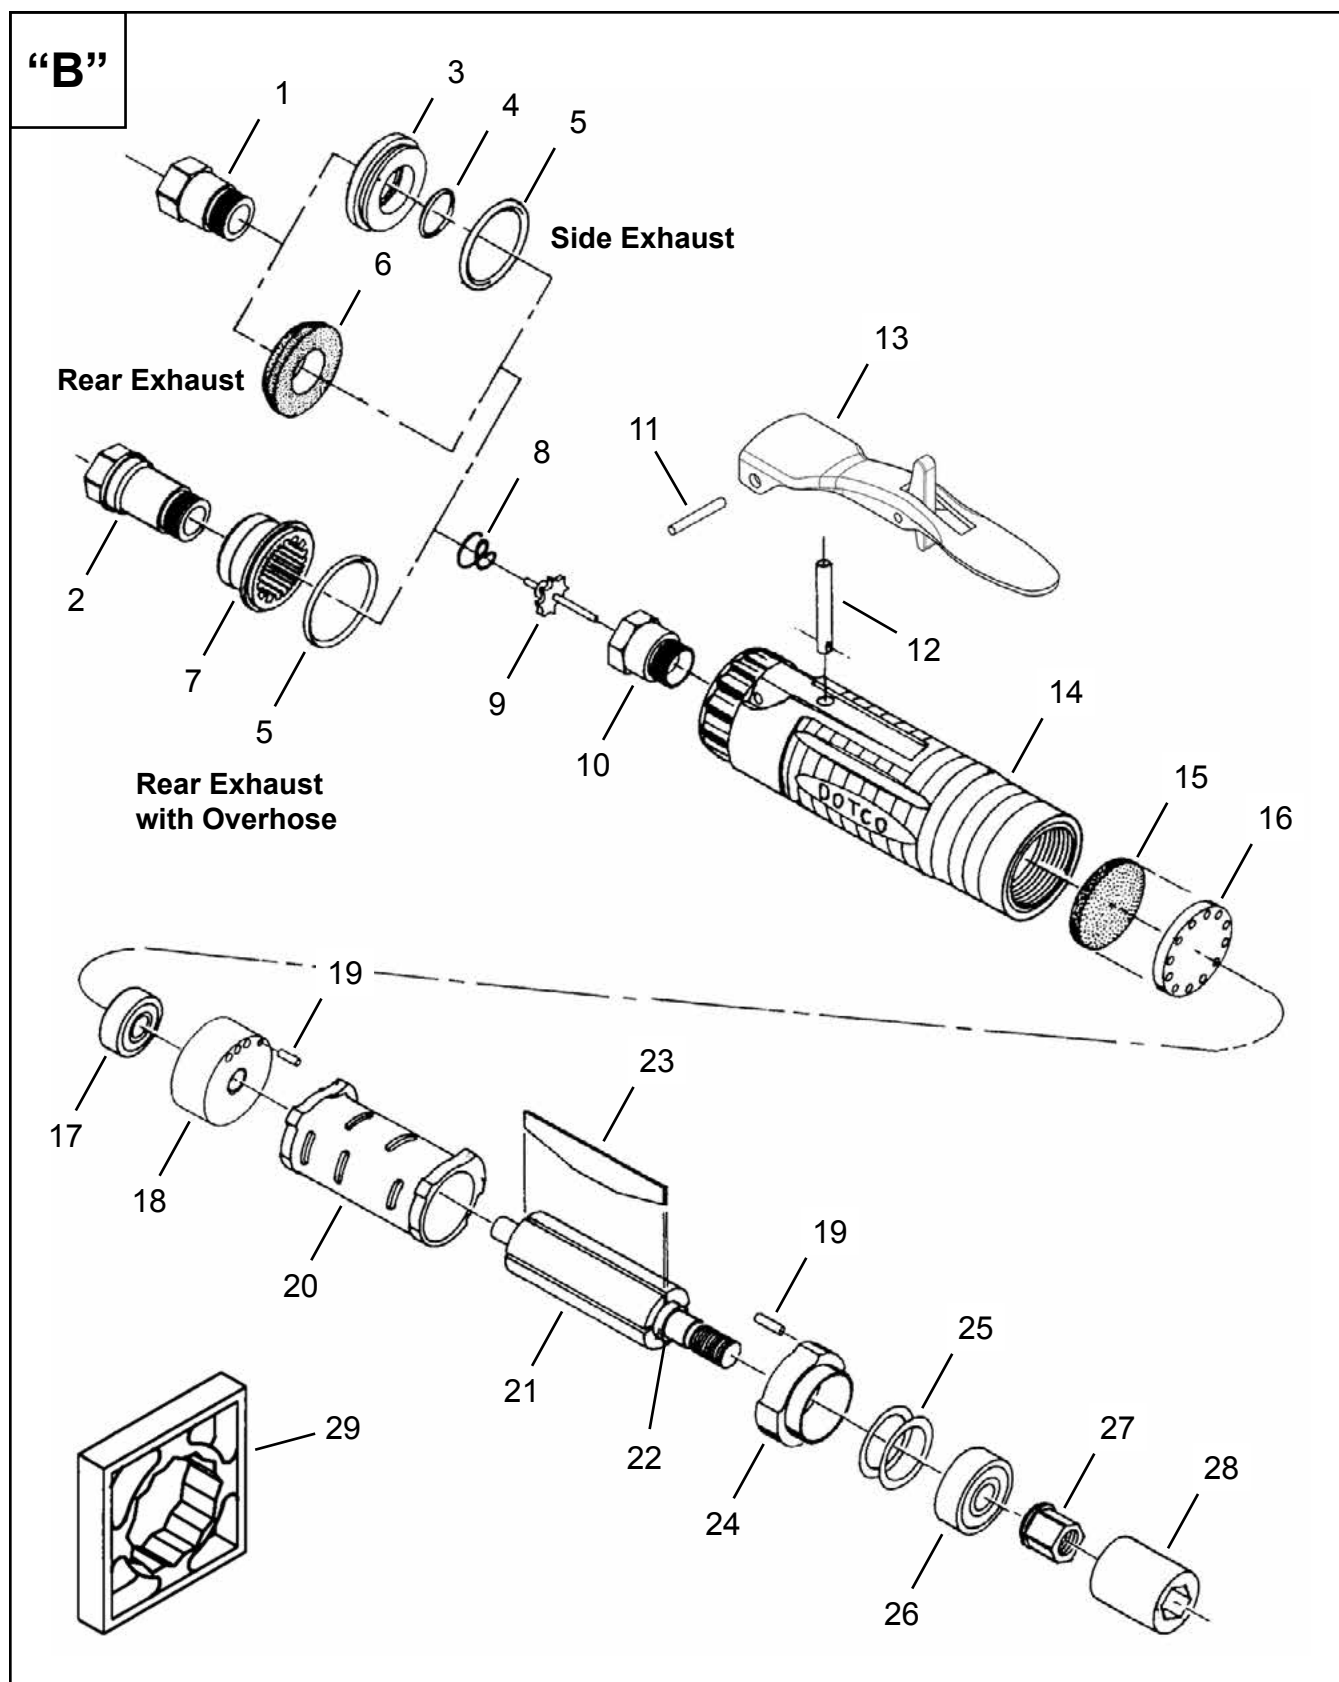

Dotco®
Handle and Motor Assembly

45-8176EN
03/31/2016

Illustration "B"


Ref	Number	#	X	EN
				Description
1	01-2505	1	1	Air Inlet Adapter (without Overhose)
2	01-1031	1	1	Air Inlet Adapter (rear exhaust with Overhose)
3	01-2506	1		Exhaust Plug
4	2965	1	3	O-Ring
5	3036PT	1	3	O-Ring
6	01-2520	1	1	Diffuser
7	01-1032	1	1	Muffler
8	01-2519	1	3	Valve Spring
9	01-2518	1	1	Valve
10	01-2504	1		Valve Seat
11	1042	1	1	Lever Pin
12	01-2517	1		Push Rod
13	01-1267	1	1	Lock-Off Throttle Lever
14	01-2560	1		Motor Housing
15	4293	1	3	Filter Disc
16	01-2016PT	1		Filter Retainer
17	538PT	1	2	Ball Bearing
18	7003PT	1		Rear Plate (includes 1 Ref. 19)
19	1041	2	4	Locator Pin
20	2255PT	1		Cylinder
21	7654S	1		Rotor
22	2017PT	1	1	Rotor Spacer
23	2253PT	4	12	Rotor Blade
24	2292	1		Front Plate (includes 1 Ref. 19)
25	2488	1	1	Shim Packet
26	500PT	1	2	Ball Bearing
27	2284	1	1	Coupling Nut
28	2287	1		Coupling
29	14-0851	1		Housing Wrench (not included with tool)

(#) Quantity

(X) Recommended Spare Parts (quantity shown based on 1-5 tools in operation)

Dotco®
Angle Head Assembly

"C"

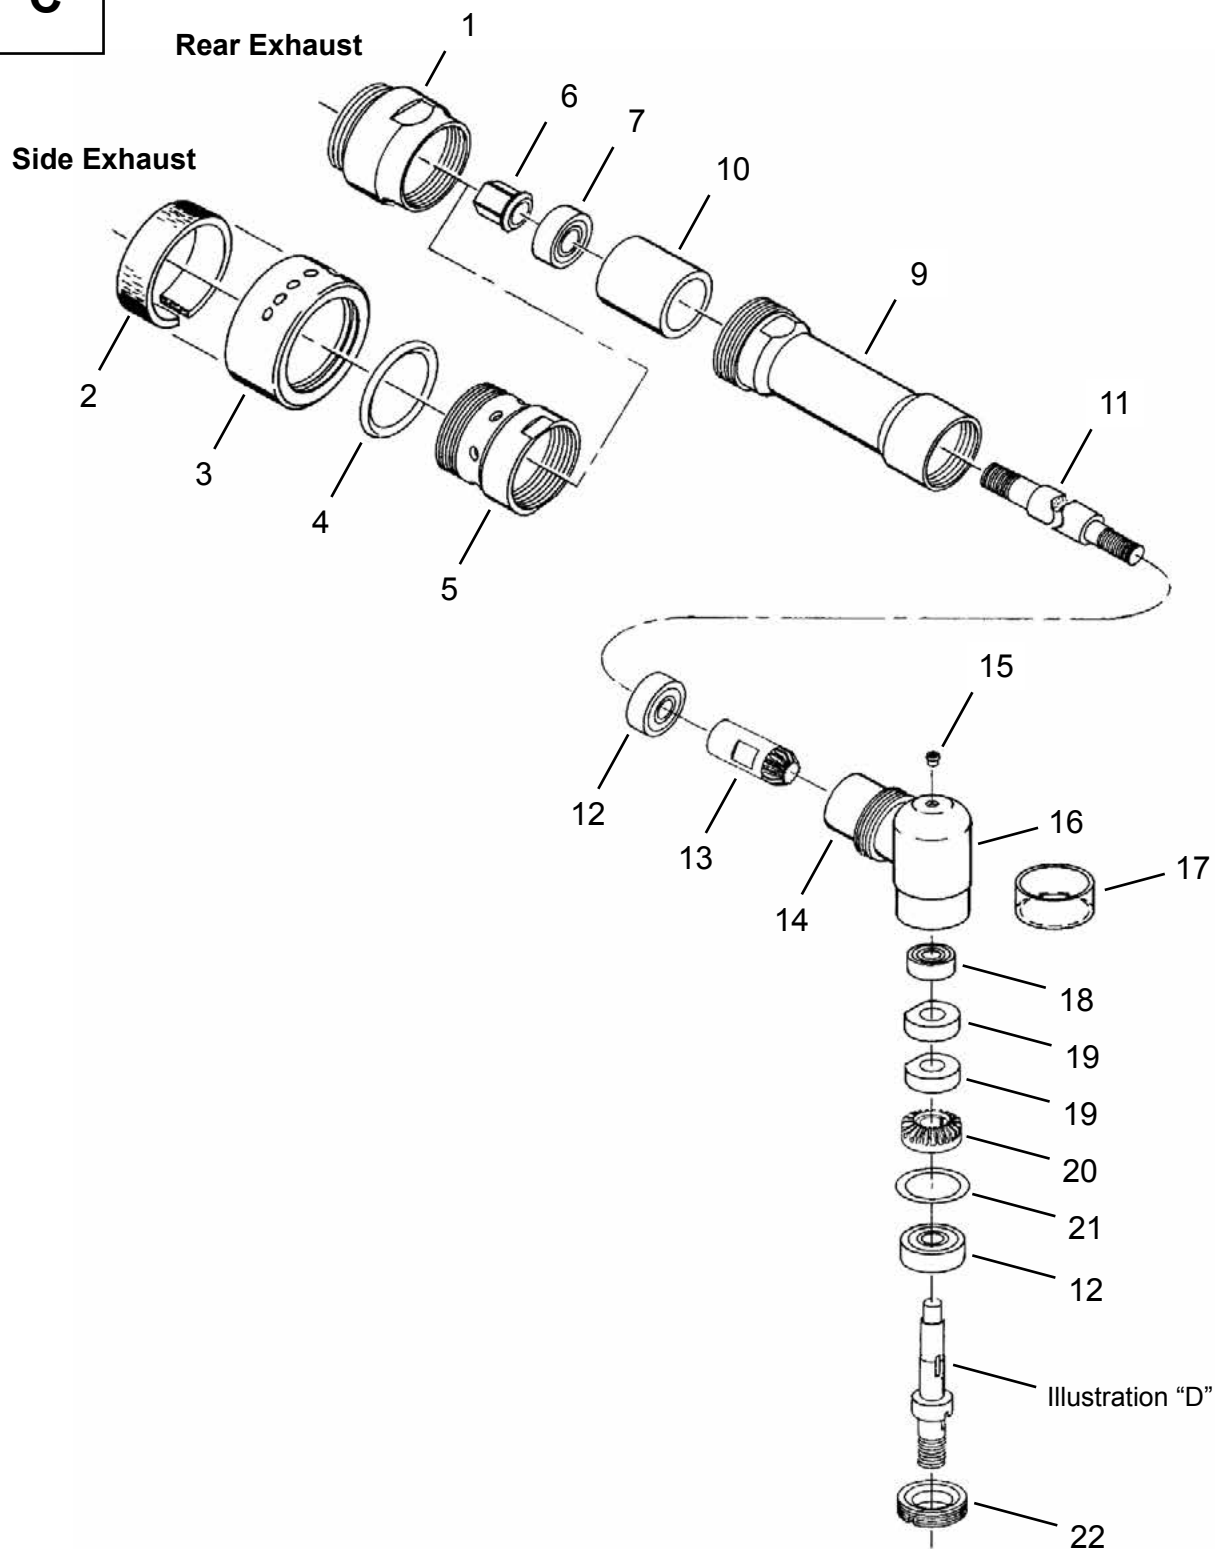

Dotco®
Angle Head Assembly

45-8176EN
03/31/2016

Illustration "C"

Ref	Number	#	X	EN
				Description
1	01-2043PT	1		Lock Ring
2	01-2065PT	1	3	Muffler
3	01-2590	1		Muffler Housing
4	01-1169	1	3	O-Ring
5	01-2067PT	1		Lock Ring
6	2284	1	1	Coupling Nut
7	506PT	1	2	Ball Bearing
8	01-2064B	1		Spindle Housing Assembly (includes Ref. 9-10)
9	01-2069PT	1		Spindle Housing
10	01-2070PT	1		Spacer
11	01-2509	1		Pinion Shaft
12	538PT	2	4	Ball Bearing
13	Table "C"	1	1	Pinion
14	1024PT	1		Angle Housing (includes 15-17)
15	1463PT	1		Grease Fitting
16	1338	1	1	Lubrication Decal
17	1356PT	1	1	Wear Ring
18	504PT	1	2	Ball Bearing
19	1755PT	2	4	Lube Disc
20	Table "C"	1	1	Bevel Gear
21	1355	1	1	Shim Packet
22	1025PT	1		Lock Ring
23	45-1982	1		Grease Gun (not shown)
24	45-0980	1		Gear Lube (not shown)
25	14-0186	1		Hex Key (3/16") (not shown)

(#) Quantity

(X) Recommended Spare Parts (quantity shown based on 1-5 tools in operation)

Table "C"

Ref.	Description	#	12(-)2716	#	12(-)2737 12(-)2777	#	12(-)2736 12(-)2776	#	12(-)2738 12(-)2778
13	Pinion	1	1187	1	1984	1	1965PT	1	1974
20	Bevel Gear	1	1188PT	1	1985	1	1964	1	1975PT

“D” Termination 30: 1/4”-20 Internal Termination 32: 1/4”-28 Internal Termination 35: 3/8”-24 Internal	Termination 36 300 Series Collet (3 piece)
Termination 45 Universal Collet (short)	

Dotco® Terminations

45-8176EN
03/31/2016

Illustration "D"

Ref	Number	#	X	EN
				Description
Terminations: -30, -32, -35, -36, -45				
1	6145	1		Spindle (Termination -30)
	1069	1		Spindle (Termination -32)
	1250PT	1		Spindle (Termination -35)
	7660	1		Spindle (Termination -36) (includes Ref. 2)
	7814PT	1		Spindle (Termination -45) (includes Ref. 2)
2	7792	1	2	Spacer
3	1062PT	1	3	Woodruff Key
4	Table "D"	1		Collet (Termination -36)
	7808PT	1		Collet (Termination -45)
5	7815PT	1		Collet Cap (Termination -45)
6	208196PT	1		Nosepiece Cap (Termination -36)
--	14-0807	1		Wrench (7/16") (not shown)
Terminations: -36 and -45				
--	14-0811	1		Wrench (11/16") (not shown)

(#) Quantity

(X) Recommended Spare Parts (quantity shown based on 1-5 tools in operation)


Table "D"

300 Series Optional Collets					
Part No.	Arbor Size	Part No.	Arbor Size	Part No.	Arbor Size
301PT	3/64"	305PT	5/32"	310PT	6mm
302PT	5/64"	306PT	3/16"	311	3mm
303	3/32"	307PT	7/32"		
304PT	1/8"	308PT *	1/4"		


* Standard Collet

“E”


Termination 27
3” Type 1 Cut-Off Wheel

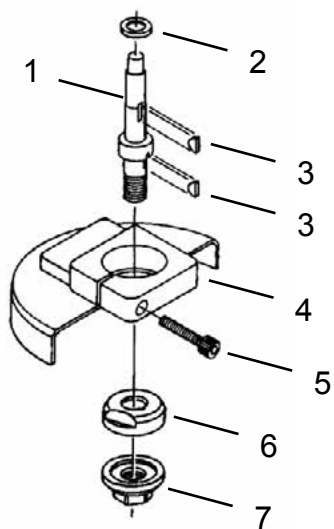


Termination 28
4” Type 1 Cut-Off Wheel

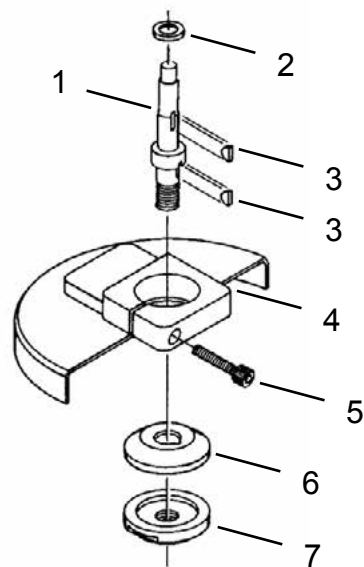

Termination 83
3” Depressed Center Wheel

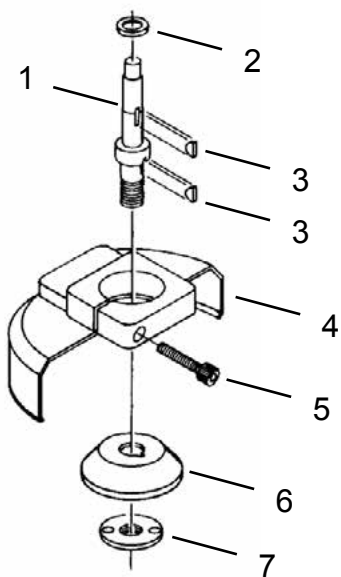

Termination 64
Termination 84
4” Depressed Center Wheel

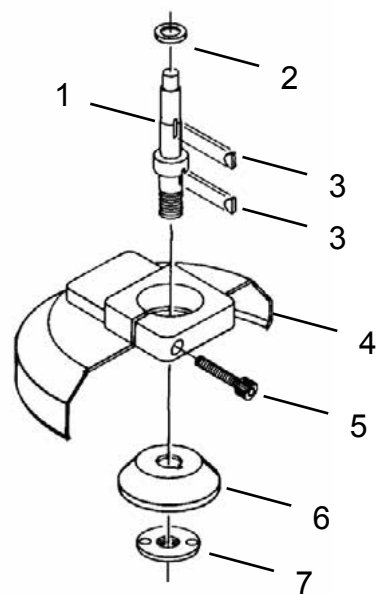

Dotco®

Terminations

45-8176EN
03/31/2016

Illustration "E"

Ref	Number	#	X	EN
				Description
Terminations: -27, -28, -64, -83, -84				
1	1402PT	1		Spindle (Terminations -27, -28, -83 and -84) (includes Ref. 2)
	7910	1		Spindle (Termination -64) (includes Ref. 2)
2	7792	1	2	Spacer
3	1062PT	2	6	Woodruff Key (Terminations -27, -28, -83 and -84)
	1062PT	1	3	Woodruff Key (Termination -64)
4	14-1258	1		3" Guard (Termination -27) (includes Ref. 5)
	14-1259	1		4" Guard (Termination -28) (includes Ref. 5)
	14-2638	1		4" Guard (Termination -64) (includes Ref. 5)
	14-2593	1		4" Guard (Termination -83) (includes Ref. 5)
	14-2594	1		4" Guard (Termination -84) (includes Ref. 5)
5	14-1518	1	2	Cap Screw
6	14-1174	1		Inner Flange (Termination -27)
	14-1172	1		Inner Flange (Termination -28)
	4504	1		Inner Flange (Termination -64)
	7667PT	1		Inner Flange (Terminations -83 and -84)
7	14-1175	1		Outer Flange (Termination -27)
	14-1173	1		Outer Flange (Termination -28)
	4505	1		Outer Flange (Termination -64)
	7668PT	1		Outer Flange (Terminations -83 and -84)
--	14-0186PT	1		Hex Key (3/16") (not shown)
Termination: -27				
--	14-0809	1		Wrench (9/16") (not shown)
--	14-0812	1		Wrench (3/4") (not shown)
Termination: -28				
--	14-0820	1		Wrench (1-1/4") (not shown)
Terminations: -64, -83 and -84				
--	7666PT	1		Spanner Wrench (not shown)

(#) Quantity

(X) Recommended Spare Parts (quantity shown based on 1-5 tools in operation)

POWER TOOLS SALES & SERVICE CENTERS

Please note that all locations may not service all products.

Contact the nearest Apex Tool Group Sales & Service Center for the appropriate facility to handle your service requirements.

NORTH AMERICA | SOUTH AMERICA

Detroit, Michigan

Apex Tool Group
2630 Superior Court
Auburn Hills, MI 48236
Phone: +1 (248) 393-5640
Fax: +1 (248) 391-6295

Lexington, South Carolina

Apex Tool Group
670 Industrial Drive
Lexington, SC 29072
Phone: +1 (800) 845-5629
Phone: +1 (919) 387-0099
Fax: +1 (803) 358-7681

Louisville, Kentucky

Apex Tool Group
1000 Glengarry Drive
Suite 150
Fairdale, KY 40118
Phone: +1 (502) 708-3400
apexpowertools.com/service

Canada

Apex Tool Canada, Ltd.
7631 Bath Road
Mississauga, Ontario L4T 3T1
Canada
Phone: (866) 691-6212
Fax: (905) 673-4400

Mexico

Apex Tool Group
Manufacturing México
S. de R.L. de C.V.
Vialidad El Pueblito #103
Parque Industrial Querétaro
Querétaro, QRO 76220
Mexico
Phone: +52 (442) 211 3800
Fax: +52 (800) 685 5560

Brazil

Apex Tool Group
Ind. Com. Ferram, Ltda.
Av. Liberdade, 4055
Zona Industrial Iporanga
Sorocaba, São Paulo
CEP# 18087-170
Brazil
Phone: +55 15 3238 3820
Fax: +55 15 3238 3938

EUROPE | MIDDLE EAST | AFRICA

England

Apex Tool Group
GmbH & Co. OHG
C/O Spline Gauges
Piccadilly, Tamworth
Staffordshire B78 2ER
United Kingdom
Phone: +44 1827 8727 71
Fax: +44 1827 8741 28

France

Apex Tool Group S.A.S.
25 rue Maurice Chevalier
B.P. 28
77831 Ozoir-La-Ferrière
Cedex, France
Phone: +33 1 64 43 22 00
Fax: +33 1 64 43 17 17

Germany

Apex Tool Group
GmbH & Co. OHG
Industriestraße 1
73463 Westhausen
Germany
Phone: +49 (0) 73 63 81 0
Fax: +49 (0) 73 63 81 222

Hungary

Apex Tool Group
Hungária Kft.
Platánfa u. 2
9027 Győr
Hungary
Phone: +36 96 66 1383
Fax: +36 96 66 1135

ASIA PACIFIC

Australia

Apex Tool Group
519 Nurigong Street, Albury
NSW 2640
Australia
Phone: +61 2 6058 0300

China

Apex Power Tool Trading
(Shanghai) Co., Ltd
Building A8, No. 38
Dongsheng Road
Pudong, Shanghai
China 201201
Phone: +86 21 60880320
Fax: +86 21 60880298

India

Apex Power Tools India
Private Limited
Gala No. 1, Plot No. 5
S. No. 234, 235 & 245
Indialand Global
Industrial Park
Taluka-Mulsi, Phase I
Hinjawadi, Pune 411057
Maharashtra, India
Phone: +91 020 66761111

Japan

Apex Tool Group Japan
Korin-Kaikan 5F,
3-6-23 Shibakoen, Minato-Ku,
Tokyo 105-0011, JAPAN
Phone: +81-3-6450-1840
Fax: +81-3-6450-1841

Korea

Apex Tool Group Korea
#1503, Hibrand Living Bldg.,
215 Yangjae-dong,
Seocho-gu, Seoul 137-924,
Korea
Phone: +82-2-2155-0250
Fax: +82-2-2155-0252

DOTCO®

Apex Tool Group, LLC

1000 Lufkin Road
Apex, NC 27539
Phone: +1 (919) 387-0099
Fax: +1 (919) 387-2614
www.apexpowertools.com